

# Kulturpalast

Dresden, Germany





© Christian Gahl / gmp Architekten

# Project Description

Since 1969, the Kulturpalast of Dresden has been one of the most distinctive cultural establishments of the GDR and stayed the most important venue of the city even after the German reunification. After 40 years of use, the "Kulti" closed in 2012 on the occasion of a complete modernisation and redevelopment.

Lindner AG was responsible for the fit-out and the coordination of all works incl. building services and stage equipment of the concert hall, the cabaret hall as well as for the restauration of the heritage-protected Mogi Ceiling in the Foyer. What followed was an immediate involvement in the project right after the closure of the contract, where Lindner carried out the complete production and installation planning as well as the engineering in 3D models for the concert hall. As a preparation for the redevelopment, Lindner Gerüstbau GmbH was contracted with the construction of 21.500 m<sup>3</sup> of complex scaffold structures. Within 18 days, about 110 tonnes of scaffolding material have been installed under sophisticated circumstances. The steel substructure of the hall was clad with specially-folded triangular gypsum fibre panels. As to the walls, both gypsum fibre systems and fire protection claddings with real-wood veneer of type FIREwood have been installed. The floor system of choice was the specialised FLOOR and more® arena. The ground floor houses a completely decoupled cabaret hall, for which Lindner developed an acoustically effective expanded metal wall and ceiling cladding and supplied further ceiling claddings as well as custom doors. The contract for the faithful restauration of the monolithic gypsum ceiling (Mogi) in the foyer could be put into practice thanks to the finding and further development of original templates.

## General

Building Type	Function rooms, Concert Halls, Theatres and Opera Houses
Company Division	Lindner SE   Fit-Out Central.East Germany, Lindner SE   Interior
Completion	2017
Client	Kommunales Immobilienmanagement Dresden
Architect	gmp Architekten von Gerkan, Marg und Partner

## Completed Works


• Floors	
Calcium sulphate panels FLOOR and more® arena	1900 sqm
Calcium Sulphate Panels NORTEC	300 sqm
• Ceilings	
Expanded Metal Ceilings	250 sqm
• Partitions	
Wall and ceiling panels FIREwood	3150 sqm
• Doors	
Wooden doors	300 Pcs.
• General Contracting	
Furniture	
Plasterboard ceiling systems	5400 sqm
Plasterboard partition systems	1900 sqm
Other design services	
Construction site equipment	

Scaffolding works  
Carpentry  
Locksmith works  
Painting works  
Floor covering works  
Steel construction works





© Christian Gahl / gmp Architekten

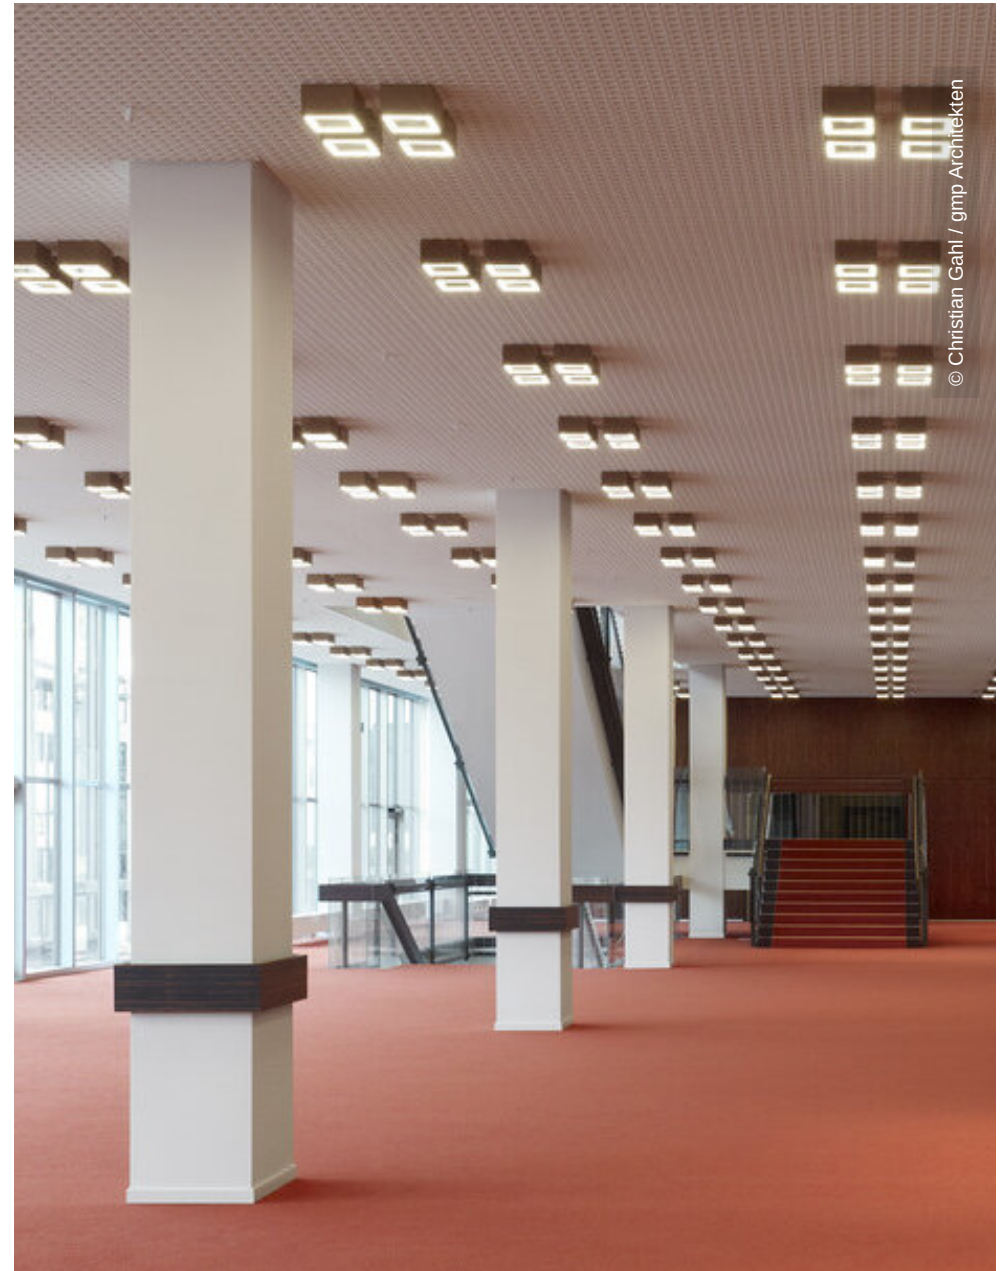


© Christian Gahl / gmp Architekten







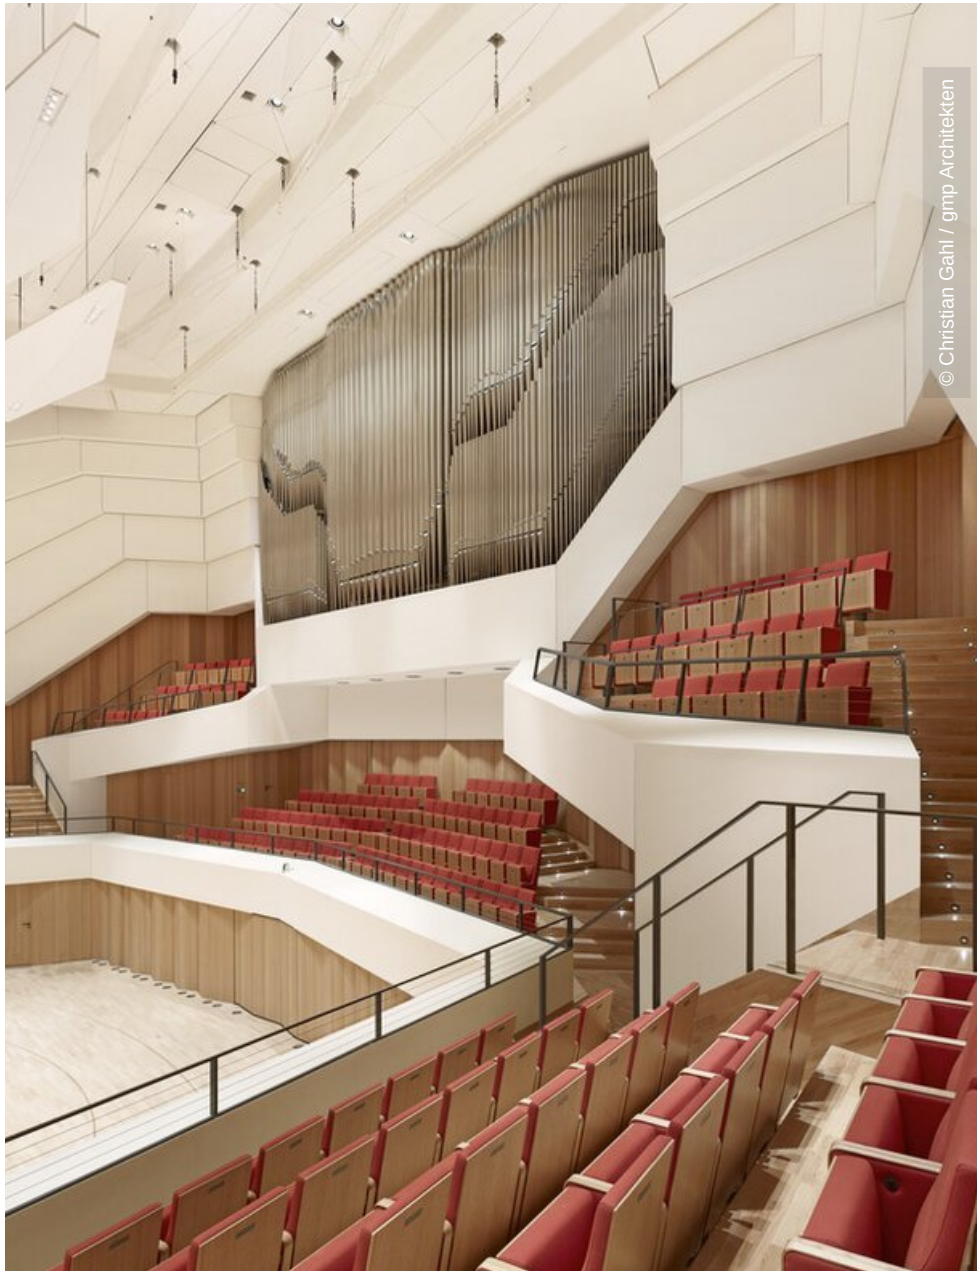

© Christian Gahl / gmp Architekten



© Christian Gahl / gmp Architekten



© Christian Gahl / gmp Architekten