


Direct / indirect wall luminaire, equipped with LED technology.

Housing is made of anodised aluminium.

Direct light is distributed via a microprismatic cover, suitable for monitor workstations.

Indirect light is distributed via an opal cover.

According to customer requirements the luminaire can be produced in different colour variations.

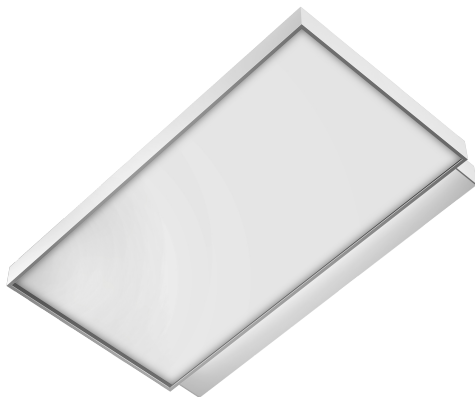


Type	Lumen Output	System Power	Dimension (l x w x h)
Slim Wall	6.400 Lumen	70 Watt	600 x 300 x 40 mm

Technical Data:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection type:	IP20
Ballast:	switchable
Cover:	microprismatic
Colour:	Aluminium anodised
Light colour:	4.000K
Colour Rendering:	RA>80

Dimension Drawing:

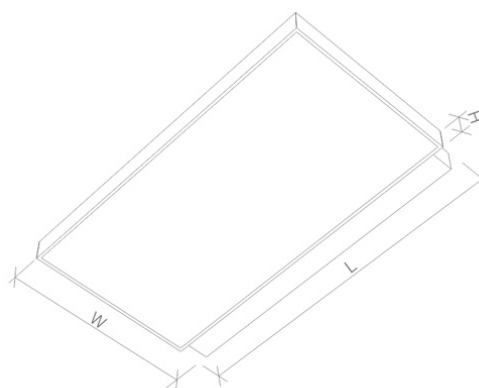

Options:

- Ballast DALI dimmable
- Light colour 3.000K
- Housing acc. to RAL card