

RSP 195 bAG

RSP 195 AG

Round downlight with high protection rating for Healthcare areas, equipped with LED technology.

Housing is made of aluminium, colour acc. to RAL 9016.

Light is distributed via a ESG glass cover with backlight foil (bAG) or via ESG with visible reflector (AG).

Also available with installation ring for flush integration into the ceiling.


Ceiling cut-out: Ø 175 mm.

Type	Lumen Output	System Power	Dimension (Ø x h)
RSP 195 1.5 bAG	1.540 Lumen	ca. 10 Watt	195 x 60 mm
RSP 195 2.0 bAG	2.140 Lumen	ca. 15 Watt	195 x 60 mm
RSP 195 2.5 bAG	2.850 Lumen	ca. 20 Watt	195 x 60 mm
RSP 195 1.5 AG	1.650 Lumen	ca. 10 Watt	195 x 60 mm
RSP 195 2.0 AG	2.300 Lumen	ca. 15 Watt	195 x 60 mm
RSP 195 3.0 AG	3.060 Lumen	ca. 20 Watt	195 x 60 mm


## Technical Data:

Voltage: 220-240 V / 50-60 Hz  
 Protection class: 2  
 Protection rating: IP65  
 Ballast: switchable, external (IP20)  
 Cover: ESG safety glass  
 Colour: RAL 9016  
 Light colour: 4.000K, CRI > 80  
 elec. connection: external ballast, switchable 3-pole, DALI 5-pole

## Dimension drawing:

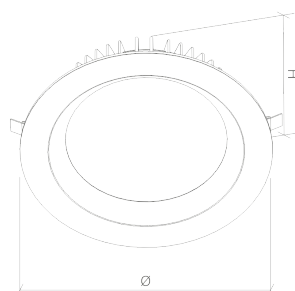

## Light distribution type bAG / AG:

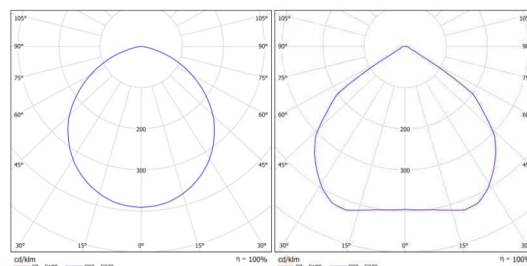

## Options:

elec. connection acc. to requirement  
 Housing colour acc. to RAL  
 Ballast DALI dimmable  
 Light colour 3.000K  
 Installation ring for flush mounting (cut-out Ø 201 mm)  
 Colour rendering CRI > 90  
 Tunable White