

Recessed luminaire for plasterboard ceilings, equipped with LED technology.

Housing is made of sheet steel, colour acc. to RAL 9016.

Light is distributed via an opal acrylic cover.

Ceiling cut-out = \varnothing - 10 mm

Integration depth = minimum 150 mm


Easy installation due to pushing angles for ceilings with thickness from 12,5 up to 90 mm.

Type	Lumen Output	System Power	Dimension (\varnothing x h)
RS 270 1.5 OS	1.650 Lumen	15 Watt	270 x 130 mm
RS 370 3.0 OS	3.450 Lumen	33 Watt	370 x 130 mm
RS 490 6.0 OS	6.400 Lumen	69 Watt	490 x 130 mm
RS 620 9.0 OS	9.200 Lumen	85 Watt	620 x 130 mm

Technical Data:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection type:	IP20
Ballast:	switchable
Cover:	opal
Colour:	RAL 9016
Light colour:	4.000K
Colour Rendering:	RA>80

Dimension Drawing:

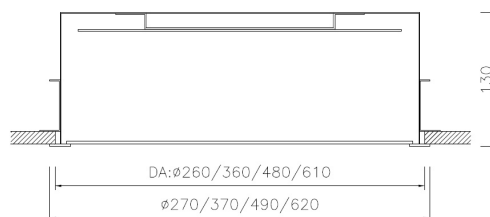

Options:

- Ballast DALI dimmable
- Light colour 3.000K
- Housing acc. to RAL card