



NORTEC WOODline

Raised floor with parquet


The raised access floor system NORTEC is the ideal product for nearly all applications with its excellent technical and building-physical characteristics. The raised access floor panels consist of fibre-reinforced calcium sulphate and are applied with a steel sheet on the lower side. The panels are protected against shock and humidity by an edge trim on all edges. The substructure consists of height-adjustable zinc-coated steel pedestals from our own production which form the necessary cavity for installations and gaskets for sound decoupling.

- **Superb walking comfort**
- **Very high loadability**
- **Non-combustible**
- **Simple lifting and exchanging of single panels**
- **Parquet slats from own production with highest quality**

Examples for areas of application

Work: Common Rooms, Facilities for Meetings, Conventions and Conferences, Office Buildings

Public Areas: Escape Routes

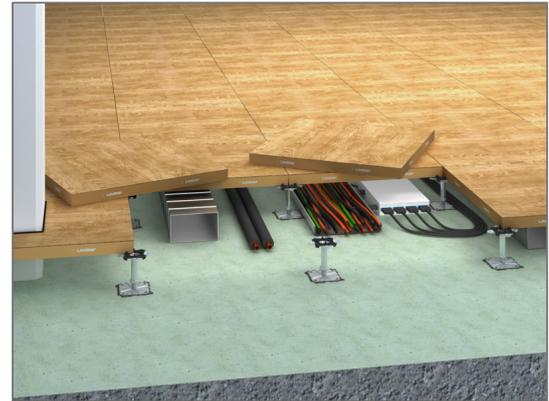

Technical details

Dimensions

Pedestal grid		600 mm x 600 mm
Dimensional deviation	EN 12825	Class 1

Static

Statics

Seismic safety	possible according to DIN EN 1998-1
----------------	-------------------------------------

Fire protection

Building Material Class

Building Material Class	EN 13501-1	A1
Building Material Class	DIN 4102 1	A2
Designation by building authorities	EN 13501-1	non-combustible



Designation by the building authorities | DIN 4102 1 | non-combustible

Sustainability

Declarations

Circular Economy	Cradle to Cradle Certified [®] Silver
EPD (Environmental Product Declaration)	The product has a verified EPD in compliance with the applicable standards. (ISO 14025/EN 15804)
French VOC Regulation	Emission class A+
Sustainable forestry	Our products can be supplied FSC [™] -certified (chain of custody certification) and fulfil all the necessary requirements. Certificate number: TUEV-COC-000515 Licence number: FSC-C119815

Coverings

Coverings

Suitability of covering	WOODline
-------------------------	----------