



T0-1 Type S

Sliding door

Sliding door leaf, approx. 41 mm, 49 mm or 68 mm with laminated intermediate layer and strengtheners of oriented strand board, single door leaf without fire protection (Sound insulation, radiation protection, moisture resistance on demand).

- Je nach Einsatzgebiet, Ausführung und Größe kann die Leistung variieren
- Sonderlösungen projektbezogen möglich

Examples for areas of application


Work: Facilities for Meetings, Conventions and Conferences, Office buildings

Healthcare: Clinics and Hospitals, Laboratories and Research Facilities

Hotels and Gastronomy: Hotels and Resorts

Public Institutions: Courts and prisons, Government and municipal buildings

Residential building

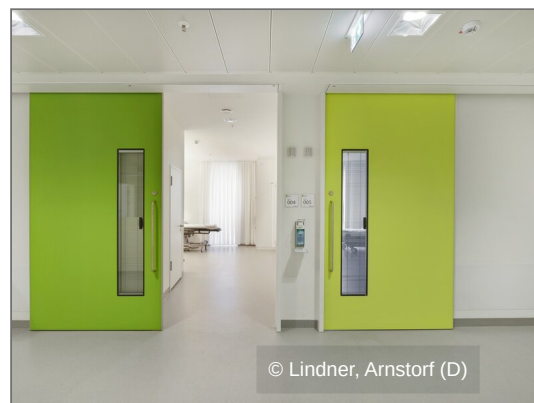

Technical details

Technical Details

Climate Class	DIN EN 12219	2 3
mechanical stress		group E group S
Installation options		Lindner partition systems Drywall Solid walls
Edge design (door leaf)		Plastic edge band PU-edge Solid wood edge band Solid wood inset edge band
Frame type		Wooden enclosing frame Steel frame (one and two-piece)
Glazing		Circular glazing Frame width 135mm Frame width min. 110mm Special shapes
Number of leaves		single-leaf
Door leaf weight		26 - 44 kg/m ²

Dimensions

Dimensions



Width (B)	750 - 1400 mm
Height (H)	625 - 3000 mm
Door leaf thickness	approx. 41 mm approx. 49 mm approx. 68 mm

Acoustics

Building acoustics

Weighted sound reduction index	ISO 717-1	R _w	42 dB
--------------------------------	-----------	----------------	-------

Safety

Security

Radiation Protection	DIN 6834 mmPb	lead equivalent value 2 mm Pb
----------------------	---------------	-------------------------------

Durability

Durability

Suitability for wet rooms	moisture resistant
Suitability for wet rooms	capable for wet rooms

Surfaces

Surfaces

Surfaces	Bauseitiger Anstrich/Grundierfolie Real wood veneer HPL-Schichtstoff Lackiert
----------	--

Sustainability

Declarations

Emission report	An expert opinion is available for the product with regard to its emission values. The test laboratory is accredited according to ISO 17025 and notified for EN 16516.
Sustainable forestry	Our products can be supplied PEFC-certified (chain of custody certification). Certificate registration no.: TUEV-PEFC-COC-240109

Key figures

Formaldehyde emissions	< 3 µg/m ³
------------------------	-----------------------

Evidence

Indoor Air Comfort	Accomplished
Indoor Air Comfort Gold	Accomplished
AgBB	Accomplished



BREEAM International	Conform
LEED v4	Conform
DGNB	Conform