



## T0-1 Type S

### Sliding door

Sliding door leaf, approx. 41 mm, 49 mm or 68 mm with laminated intermediate layer and strengtheners of oriented strand board, single door leaf without fire protection (Sound insulation, radiation protection, moisture resistance on demand).

#### Examples for areas of application


**Work:** Facilities for Meetings, Conventions and Conferences, Office buildings

**Healthcare:** Clinics and Hospitals, Laboratories and Research Facilities

**Hotels and Gastronomy:** Hotels and Resorts

**Public Institutions:** Court Houses, Government Buildings

**Residential**

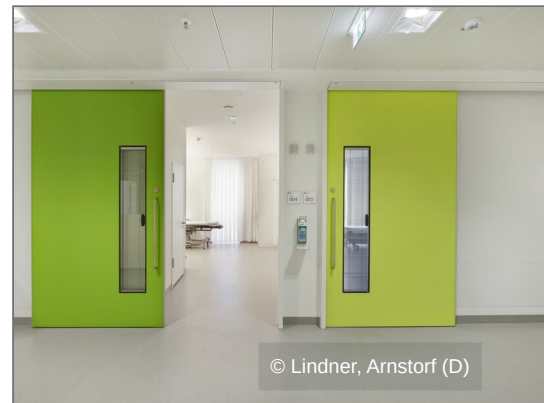

The mark of responsible forestry

## Technical details

### Technical data

DIN EN 12219	DIN EN 12219	2 3
mechanical stress		group E group S
Installation options		Lindner partition systems Drywall Solid walls
Edge design (door leaf)		Plastic edge band RAL-/NCS coated edge Solid wood edge band Solid wood inset edge band PU-edge
Frame type		Wooden enclosing frame Stahlzarge (ein-, zweiteilig)
Glazing		Circular glazing Friesbreite 135 mm



		Friesbreite min. 110 mm Special shapes
Number of leaves		single-leaf
Door leaf weight		26 - 44 kg/m <sup>2</sup>
max. surface load		26 kg/m <sup>2</sup>

## Dimensions

### Dimensions

Width (B)	750 - 1400 mm
Height	625 - 3000 mm
Door leaf thickness	approx. 41 mm approx. 49 mm approx. 68 mm

## Acoustics

### Building acoustics

Airborne soundproofing	ISO 717-2 abhängig Zusatzmaßnahmen	R <sub>w</sub>	42 dB
------------------------	---------------------------------------	----------------	-------

## Safety

### Security

DIN 6834	DIN 6834 mmPb	lead equivalent value 2 mm Pb
----------	---------------	-------------------------------

## Durability

### Durability

Suitability for wet rooms	moisture resistant
Suitability for wet rooms	capable for wet rooms

## Surfaces

### Surfaces

Surfaces	Real wood veneer HPL-Schichtstoff RAL-/NCS-Nasslackierung bauseitiger Anstrich/Grundierfolie
----------	---



## Sustainability

### Declarations

Emission report	A report concerning VOC emissions of this product is available. Eurofins Product Testing A/S, an independent testing institute, performed the tests. The testing laboratory is ISO 17025 accredited and EN 16516 notified. For further information, please do not hesitate to contact us.
Sustainable forestry	Our products can be supplied FSC-certified (chain of custody certification). Certificate number: TUEV-COC-000515 Licence number: FSC-C119815

### Key figures

Formaldehyde emissions	< 3 µg/m <sup>3</sup>
------------------------	-----------------------

### Evidence

Indoor Air Comfort	Accomplished
Indoor Air Comfort Gold	Accomplished
AgBB	Accomplished
BREEAM International	Conform
LEED v4	Conform
DGNB	Conform