




VENEERline flex

Magnetic veneer parquet flooring

The multi-layer wood flooring consists of real wood veneer with a core of high-density fibreboard (HDF). The high density of the HDF core gives the flooring better resistance to indentation than a solid top layer. In combination with the hard wax-oiled surface, the flooring is hard-wearing and durable. The optimum utilisation of the solid cubic metre of wood through the use of a thin veneer makes a decisive contribution to resource-saving use. Up to 500 m² of top layer for the veneer flooring can be produced from one solid metre of wood. Compared to a solid wood top layer, only up to 50 m² of wood flooring can be produced from one solid cubic metre. The natural appearance of real wood flooring is guaranteed with both variants. A 1 mm thick magnetic foil is used as a backing. The flooring is laid with magnetic adhesion to sheet steel without gluing or a mechanical connection. Due to its thickness, it can be combined with other elastic coverings or SL tiles.

- low covering height
- combination possibility with Carpet, Linoleum, etc.
- real wood layer
- resource-saving
- Utilisation in rooms with normal degrees of stress, e.g. offices, meeting rooms, hotel rooms

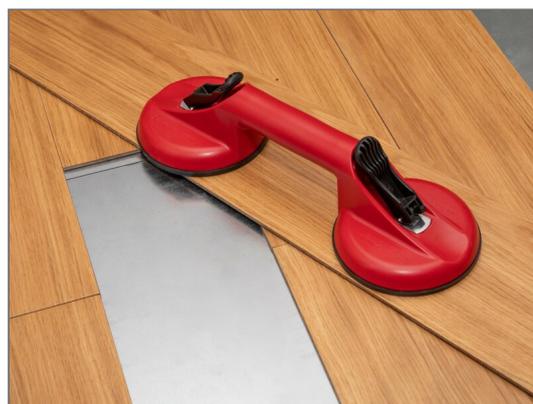

Examples for areas of application

Public Areas: Entrance Areas, Escape Routes

Work: Common Rooms, Facilities for Meetings, Conventions and Conferences, Stage and Studio Rooms, Office Buildings, Assembly Rooms

Film and Recording Studios

Education: Libraries, Research Rooms, Schools, Universities and Higher Education Buildings

Businesses, Recreation and Culture: Banks, Museums and Galleries, Sports Halls and Gymnasiums, Places of Assembly

Hotels and Gastronomy: Restaurants and Catering Facilities, Hotels and Resorts

Public Institutions: Courts and Correctional Facilities, Town Halls, Government and Administrative Buildings

Technical details

Technical data

- **Thickness:** 4.6 mm
- **Wear layer thickness:** 0.7 mm
- **Length:** 1,350 mm
- **Width:** 145 mm

Surface oiled

- **Build-up:** 2-times hard wax oiled
- **Gloss level:** matt
- **Slip resistance class:** R9
- **Stain consistency:** NK 6 (Object-suitable)
- **Wet abrasion consistency:** NK 6 (Object-suitable)
- **Types of wood:** Oak
- **Wood grading:** We use wood grading with typical structure and play of colours.