



Teardrop luminaire with yellow light, equipped with LED technology.

Due to the opal cover in the shape of a teardrop, air turbulences can be avoided. A filter effect of wavelength (< 489nm less than 1%) is achieved.

The two-sided coated diffusion layer enables the highest degree of efficiency.

The cover is mounted by stainless steel springs on the inside, without additional tools.


Delivery for single installation, as option with through wiring for linear light strips.

Type	Lumen Output	System Power	Dimension (l x w x h)
LF y3 640 1.0 OA	1.200 Lumen	14 Watt	640 x 50 x 90 mm
LF y3 920 1.5 OA	1.670 Lumen	20 Watt	920 x 50 x 90 mm
LF y3 1200 2.0 OA	2.150 Lumen	25 Watt	1.200 x 50 x 90 mm


Technical Information:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection kind:	IP 40
Ballast:	switchable, optional: DALI dimmable
Cover:	diffuse profile cover
Colour:	RAL 9016 or RAL 9010
Light colour:	yellow y3

Light Distribution:

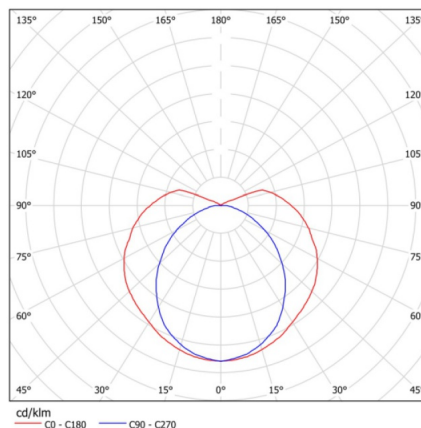

Spectral Light Distribution:

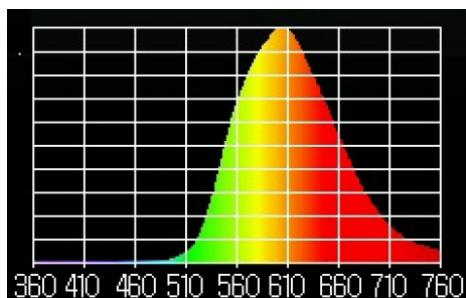

Options:

- Emergency light
- IP 54 (max. double length light strips)
- Through wiring
- electrical connection acc. to requirement