



Teardrop luminaire with yellow light, equipped with LED technology.

Due to the opal cover in the shape of a teardrop, air turbulences can be avoided.

Variation with special Amber LED modules with focused selective light spectrum.

Because of the use of these LED modules an additional filter layer is not required.

The two-sided coated diffusion layer enables the highest degree of efficiency.

The cover is mounted by stainless steel springs on the inside, without additional tools.


Delivery of single luminaires or delivery for formation of linear lighting strips are possible.

Type	Lumen	Power	Dimension (l x w x h)
LF y5 600 1.0 OA	1.080 Lumen	18 Watt	600 x 50 x 90 mm
LF y5 1200 2.0 OA	2.160 Lumen	36 Watt	1.200 x 50 x 90 mm


### Technical Data:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection kind:	IP40
Ballast:	switchable
Cover:	diffuse profile cover
Colour:	RAL 9016 or RAL 9010
Light colour:	yellow y5
Elec. connection:	3-pole connection terminal

### Spectral light distribution:

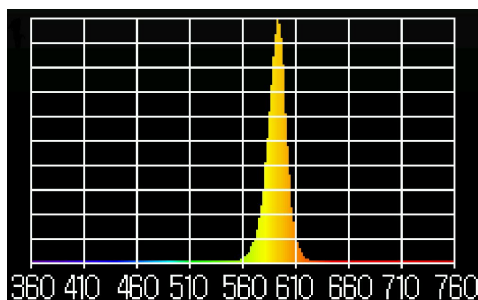

### Light distribution:

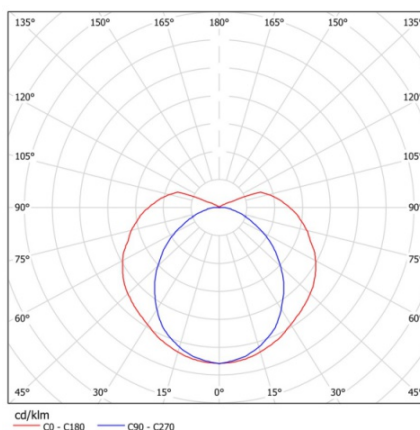

### Options:

- Elec. connection acc. to requirements
- Through-wiring
- Emergency light
- DALI dimmable LED driver