


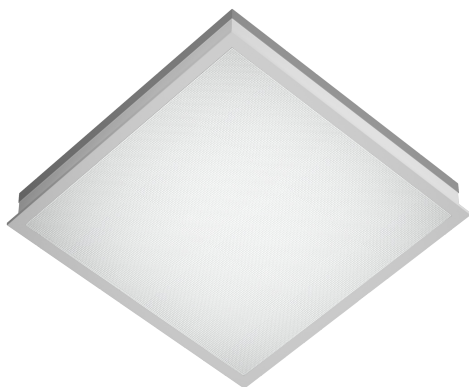

Lay-in luminaire for T-Rail profile ceiling systems, equipped with LED technology.

The frame is powder-coated acc. to RAL 9016.
The luminaire provides high colour rendering (CRI>90) and dynamic white-LEDs (930-965) for daylight adjustment.

Light is distributed via a microprismatic cover for monitor workstations. Easy cleaning due to additional ESG glass cover.

Please note for installation:

For achieving IP65 protection (room-side), sealing measures with the ceiling system must be made on-site.

Type	Light System (OS MPS-j AG)	Dimension (l x w x h)
DYN TW 625	LED 930: 4.440 Lumen, 67 Watt LED 965: 6.600 Lumen, 116 Watt	620 x 620 x 115 mm
DYN RGB(W) 625	upon request	620 x 620 x 115 mm

Technical Information:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection kind:	IP65, ceiling-side IP20
Ballast:	DALI (DT6)
Cover:	opalised microprismatic + ESG
Colour:	RAL 9016
Colour rendering:	RA>90

Options:

Housing acc. to RAL Card

Variation for system ceilings 600 x 600 mm

Dimension Drawing:

