leuchten.fabrik
Ein Unternehmen der Lindner Group

Product Data Sheet
Downlight EDL 34

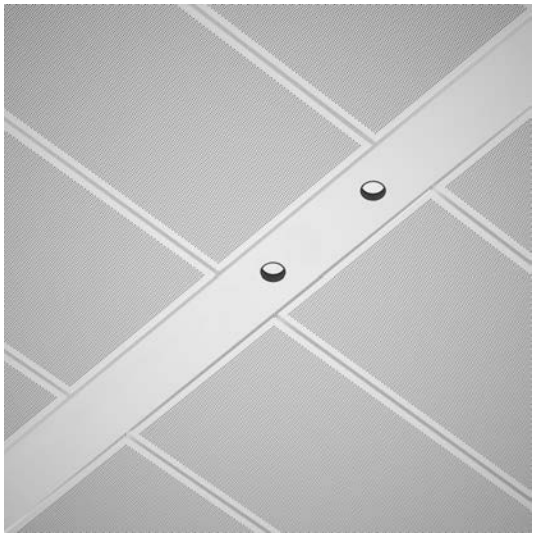

System downlight for postcaps, equipped with LED technology.

Light is distributed via a black reflector.

The luminaire is integrated into a postcap. Integration depth minimum 85 mm.

Delivery inclusive external ballast.

Type	Lumen Output	System Power	Dimension (Ø cut-out / Ø x ET)
EDL 34 1.0	1.100 Lumen	15 Watt	35 / 100 x 85 mm
EDL 34 1.5	1.500 Lumen	20 Watt	35 / 100 x 85 mm

Technical Data:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection type:	IP20
Ballast:	switchable
Cover:	reflector
Colour:	RAL 9006
Light colour:	4.000K
Colour Rendering:	RA>80

Dimension Drawing:



Options:

Ballast DALI dimmable
Light colour 3.000K
Housing acc. to RAL card
RA>90
Through-wiring
Emergency light

Subject to change without notice. This data sheet is our property. Submitting to third parties or changes are not allowed.

Lindner AG, Moosstraße 1, 84051 Mettenbach, Deutschland, Tel.+49 (0) 8702 67148 0, www.Lindner-Group.com, Info@Leuchtenfabrik.com