



Round wall or ceiling luminaire for surface mounting, equipped with LED technology.

Housing is made of sheet steel, colour acc. to RAL 9016.

Soft ceiling illumination is made by a circumferential indirect light.

Light is distributed via an microprismatic cover (product BWF) with backlight foil.


Electrical connection area on back side is slightly stepped (height: 22 mm).

Type	Lumen Output	System Power	Dimension (Ø x h)
FLAT C 300 1.5 bMPS-b	1.540 Lumen	15 Watt	300 x 75 (53+22) mm
FLAT C 360 3.0 bMPS-b	3.080 Lumen	30 Watt	360 x 75 (53+22) mm
FLAT C 470 3.5 bMPS-b	3.680 Lumen	36 Watt	470 x 75 (53+22) mm
FLAT C 600 4.5 bMPS-b	4.900 Lumen	48 Watt	600 x 75 (53+22) mm
FLAT C 900 7.0 bMPS-b	7.400 Lumen	57 Watt	900 x 75 (53+22) mm
FLAT C 1200 10.5 bMPS-b	10.660 Lumen	84 Watt	1.200 x 75 (53+22) mm

## Technical Data:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection type:	IP20
Ballast:	switchable
Cover:	microprismatic
Colour:	RAL 9016
Light colour:	4.000K
Colour Rendering:	RA>80

## Dimension Drawing:

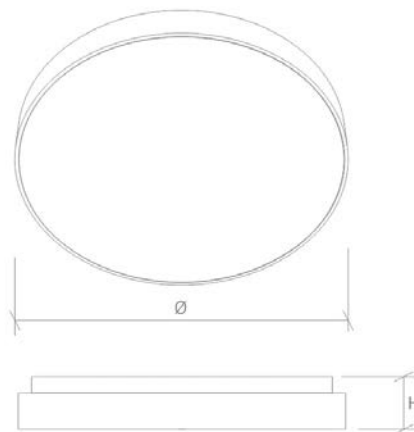

## Options:

- Ballast DALI dimmable
- Housing acc. to RAL card
- Light colour 3.000K
- Opal cover
- Microprismatic cover UGR<19, (product Jungbecker)