



Round wall or ceiling luminaire for surface mounting, equipped with LED technology.

Housing is made of sheet steel, colour acc. to RAL 9016.

Soft ceiling illumination is made by a circumferential indirect light.

Light is distributed via an microprismatic cover (product Jungbecker) with backlight foil. UGR<19.


Electrical connection area on back side is slightly stepped (height: 22 mm).

Type	Lumen Output	System Power	Dimension (Ø x h)
FLAT C 300 1.0 bMPS-j	1.230 Lumen	15 Watt	300 x 75 (53+22) mm
FLAT C 360 2.5 bMPS-j	2.460 Lumen	30 Watt	360 x 75 (53+22) mm
FLAT C 470 2.5 bMPS-j	2.950 Lumen	36 Watt	470 x 75 (53+22) mm
FLAT C 600 3.5 bMPS-j	3.920 Lumen	48 Watt	600 x 75 (53+22) mm

### Technical Data:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection type:	IP20
Ballast:	switchable
Cover:	microprismatic, UGR<19
Colour:	RAL 9016
Light colour:	4.000K
Colour Rendering:	RA>80

### Dimension Drawing:

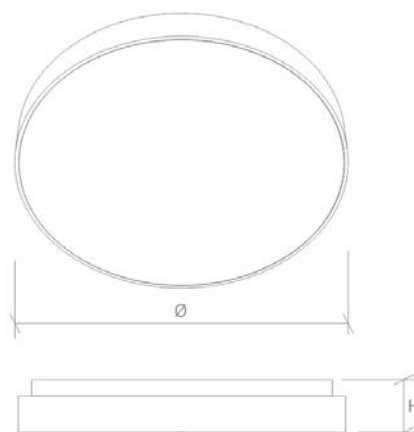

### Options:

- Ballast DALI dimmable
- Housing acc. to RAL card
- Light colour 3.000K
- Opal cover
- Microprismatic cover (product BWF)