leuchten.fabrik
Ein Unternehmen der Lindner Group

Product Data Sheet
Downlight QDL

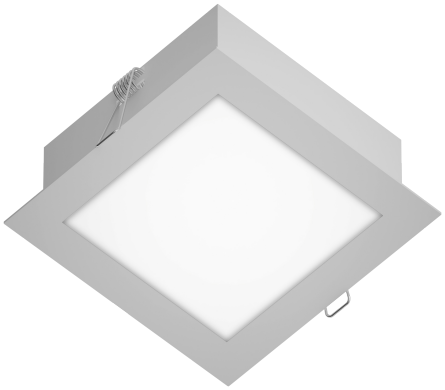

Recessed downlight for plasterboard ceilings, equipped with LED technology.

Housing is made of sheet steel, colour acc. to RAL 9016.

Light is distributed via an opal acrylic cover.

Suitable for narrow-space areas due to the low construction height.

Delivery inclusive external ballast.

Type	Lumen Output	System Power	Dimension (l x w x h)
QDL 104 1.0 OS	1.000 Lumen	9 Watt	104 x 104 x 42 mm
QDL 185 1.5 OS	1.900 Lumen	17 Watt	185 x 185 x 42 mm

Technical Data:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection type:	IP20
Ballast:	switchable
Cover:	opal
Colour:	RAL 9016
Light colour:	4.000K
Colour Rendering:	RA>80

Dimension Drawing:

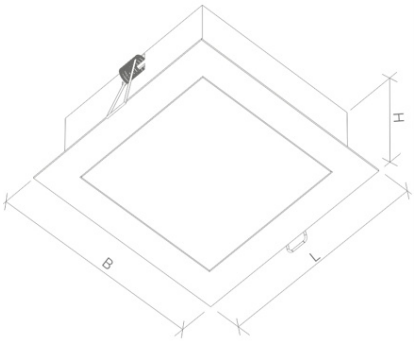

Options:

Ballast DALI dimmable
Light colour 3.000K
Housing acc. to RAL card
Through-wiring

Subject to change without notice. This data sheet is our property. Submitting to third parties or changes are not allowed.

Lindner AG, Moosstraße 1, 84051 Mettenbach, Deutschland, Tel.+49 (0) 8702 67148 0, www.Lindner-Group.com, Info@Leuchtenfabrik.com