leuchten.fabrik
Ein Unternehmen der Lindner Group

Product Data Sheet
Downlight RDL

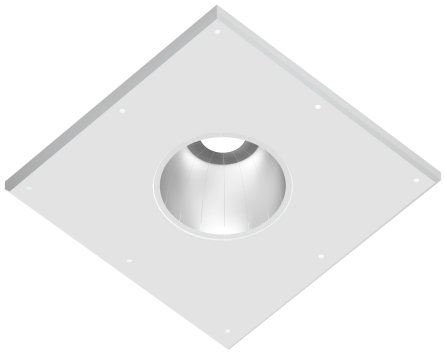

Round and frameless downlight for plasterboard ceilings, equipped with LED technology.

Light is distributed via a wide-angle reflector (62°).

Luminaire is integrated into a plasterboard module. Suitable for integration in plasterboard ceilings. (thickness 12,5 mm).

Ø reflector: app. 110 mm.
Installation depth: minimum 160 mm.

Delivery inclusive external ballast.

Type	Lumen Output	System Power	Dimension (l x w x inst. depth)
RDL 110 1.5	1.600 Lumen	15 Watt	ca. 250 x 250 x 160 mm

Technical Data:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection type:	IP20
Ballast:	switchable
Cover:	reflector
Colour:	silver
Light colour:	4.000K
Colour Rendering:	RA>80

Dimension Drawing:

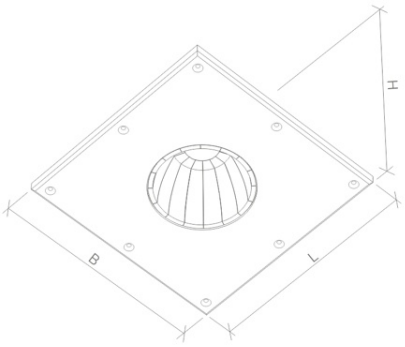

Options:

Ballast DALI dimmable
Light colour 3.000K
Reflector white
RA>90

Subject to change without notice. This data sheet is our property. Submitting to third parties or changes are not allowed.

Lindner AG, Moosstraße 1, 84051 Mettenbach, Deutschland, Tel.+49 (0) 8702 67148 0, www.Lindner-Group.com, Info@Leuchtenfabrik.com