


Square wall or ceiling luminaire for surface mounting, equipped with LED technology.

Housing is made of sheet steel, colour RAL 7024 and RAL 9016.

Light is distributed via an opal acrylic cover.

Electrical connection area on back side is slightly stepped (height: 18 mm).

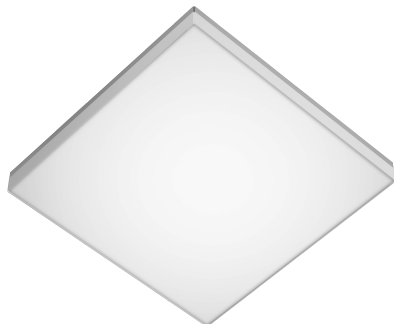


Type	Lumen Output	System Power	Dimension (l x w x h)
WA 400 3.5 OS	3.740 Lumen	32 Watt	400 x 400 x 64 (46+18) mm

Technical Data:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection type:	IP20
Ballast:	switchable
Cover:	opal
Colour:	RAL 7024 / RAL 9016
Light colour:	4.000K
Colour Rendering:	RA>80

Dimension Drawing:

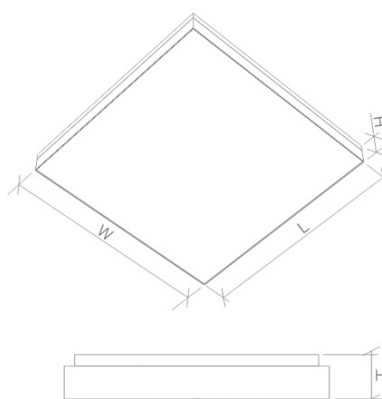

Options:

Ballast DALI dimmable
Light colour 3.000K