

Integrated system luminaire, equipped with LED technology.

Light is distributed via a special micro-lens cell louvre, suitable for monitor workstations (UGR<18).


The luminaire is suitable for integration into Lindner metal ceiling panels and Lindner post caps. Clip-in system in specially prepared cut-out.

Type	Lumen	System Power	Dimension (l x w x h)
QZLi - 300 1.0	1.300 Lumen	9,1 Watt	280 x 40 x 30 mm
QZLi - 600 2.5	2.600 Lumen	18,2 Watt	560 x 40 x 30 mm
QZLi - 900 3.5	3.900 Lumen	27,3 Watt	840 x 40 x 30 mm
QZLi - 1200 5.0	5.200 Lumen	36,4 Watt	1.120 x 40 x 30 mm
QZLi - 1500 6.5	6.500 Lumen	45,5 Watt	1.400 x 40 x 30 mm

Technical Information:

Voltage:	220-240 V / 50-60 Hz
Protection class:	1
Protection type:	IP20
Ballast:	switchable, external
Cover:	cell louvre, white
Colour:	RAL 9016
Light colour:	4.000K
Colour rendering:	RA>80

Dimension Drawing:

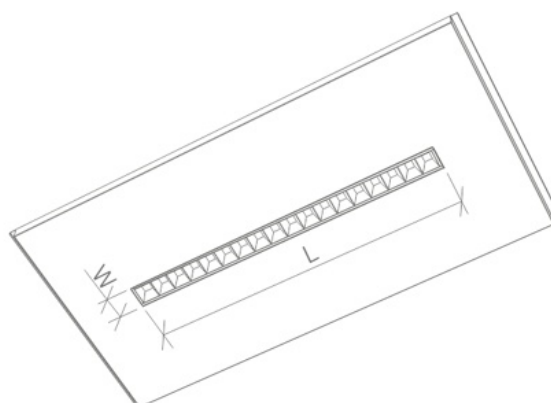

Options:

- Light Colour 3.000K
- Ballast DALI dimmable
- High-Output LED (Lumen + app. 40%)
- Cell louvre colours: white, black, chrome, chrome matted