

RS 195 bAG

RS 195 AG

Round recessed downlight, equipped with LED technology.

Housing is made of aluminium, colour acc. to RAL 9016.

Light is distributed via a ESG glass cover with backlight foil (bAG) or via ESG with visible reflector (AG).


Ceiling cut-out:  $\varnothing$  175 mm.

Type	Lumen Output	System Power	Dimension ( $\varnothing$ x h)
RS 195 1.5 bAG	1.540 Lumen	approx. 10 Watt	195 x 60 mm
RS 195 2.0 bAG	2.140 Lumen	approx. 15 Watt	195 x 60 mm
RS 195 2.5 bAG	2.850 Lumen	approx. 20 Watt	195 x 60 mm
RS 195 1.5 AG	1.650 Lumen	approx. 10 Watt	195 x 60 mm
RS 195 2.0 AG	2.300 Lumen	approx. 15 Watt	195 x 60 mm
RS 195 3.0 AG	3.060 Lumen	approx. 20 Watt	195 x 60 mm


## Technical Data:

Voltage: 220-240 V / 50-60 Hz  
 Protection class: 2  
 Protection rating: IP 44  
 Ballast: switchable, external (IP20)  
 Cover: ESG safety glass  
 Colour: RAL 9016  
 Light colour: 4.000K, CRI > 80  
 elec. connection: external ballast, switchable 3-pole, DALI 5-pole

## Dimension drawing:



## Light distribution type bAG / AG:

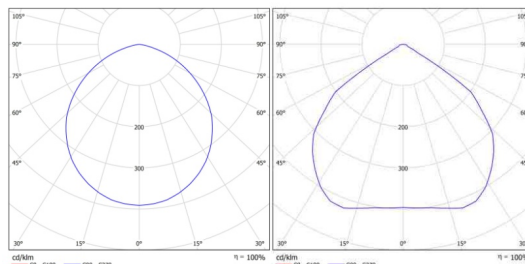

## Options:

elec. connection acc. to requirement  
 Housing colour acc. to RAL  
 Ballast DALI dimmable  
 Light colour 3.000K  
 Installation ring for flush mounting (cut-out  $\varnothing$  201 mm)  
 Colour rendering CRI > 90  
 Tunable White