

Illustration as an example:
Installation flush with ceiling in metal ceiling (sealed)

Round, recessed-mounted LED downlight for clean room applications equipped with high-efficiency LED module.

Die-cast aluminium housing, powder-coated in RAL 9016.

Cover made of toughened safety glass with backlight film (bAG), homogeneously illuminated or only with toughened safety glass pane (AG) and visible reflector.


Flush mounting possible using optional installation ring.

Type	Lighting system	Approx. size D x H
RP 195 1.5 bAG	LED 840, 1.540 Lm, ca. 10 Watt	195x60mm
RP 195 2.0 bAG	LED 840, 2.140 Lm, ca. 15 Watt	195x60mm
RP 195 2.5 bAG	LED 840, 2.850 Lm, ca. 20 Watt	195x60mm
RP 195 1.5 AG	LED 840, 1.650 Lm, ca. 10 Watt	195x60mm
RP 195 2.0 AG	LED 840, 2.300 Lm, ca. 15 Watt	195x60mm
RP 195 3.0 AG	LED 840, 3.060 Lm, ca. 20 Watt	195x60mm

Technical Data:

Voltage: 220-240 V / 50-60 Hz
 Protection class: 2
 Protection rating: IP65
 Control unit: external, IP20
 switchable, optional DALI dimmer
 Elec. connection: on control unit, 3-pin plug (DALI 5-pin)
 standard with straight wiring
 Colour: RAL 9016 / customer choice
 Glass: toughened safety glass

Light distribution curve bAG | AG:

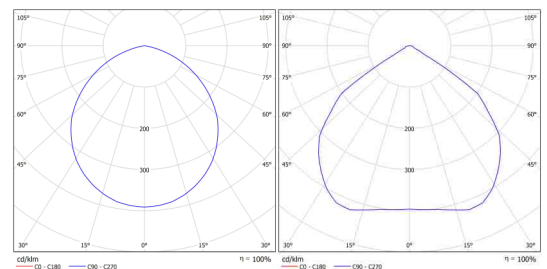

Options:

- elec. connection according to customer requirement
- installation ring for flush mounting
- centring ring for simplified sealing
- CRI>90
- tunable white
- emergency light (after consultation)
- Installation in special ceilings (after consultation)

Scale diagram:

