Paulinum, University of Leipzig

Leipzig, Germany

Lindner



© Steffen Spitzner

Lindner

Project Description

When the former university church St. Pauli was blasted in 1968 by the order of the SED regime, it left a scar at Leipzig´s Augustplatz. After Germany´s reunification, the decision in favour of a reconstruction was made, even though with a mixed use: an exhibition area for sacral pieces of art that were rescued before the deconstruction; an auditorium for the university and last but not least a church.

Lindner AG was contracted with a large scope of works for the interior fit-out of the auditorium. This includes the construction of a vaulted ceiling with numerous ornamentations that were created with stucco elements. About 3,200 metres of hollow stucco profiles have been fitted on an area of about 900 sqm. The auditorium features 16 pillars, which have been cladded in glass, a total of 320 individual panes. Natural light shines through eleven gothic windows, whose construction was also the responsibility of Lindner. As to the flooring, the choice was in favour of FLOOR & more® comfort, a powerful hollow floor with integrated heating technology. At the same time, its natural stone covering completes the sophisticated aura of the room.

General

Building Type	Schools, Teaching, Class and Educational Rooms, Multipurpose Buildings, Function rooms, Museums and Galleries, Cultural buildings, Public and institutional buildings, Others
Company Division	Lindner SE | Fit-Out Central.East Germany
Completition	2012 - 2017
Architect	Erick van Egeraat Architects

Client | Staatsbetrieb Sächsisches Immobilien- und Baumanagement

Completed Works

- **Floors**

  Calcium Sulphate Panels
  FLOOR and more® comfort

- **Dry lining**

  MUTE+® Sound absorbers for walls and ceilings

- Plasterboard partition systems 2500 sqm
  Steel construction works
  Plastering works
  Stucco works 900 sqm
  Painting works 3400 sqm


© Steffen Spitzner

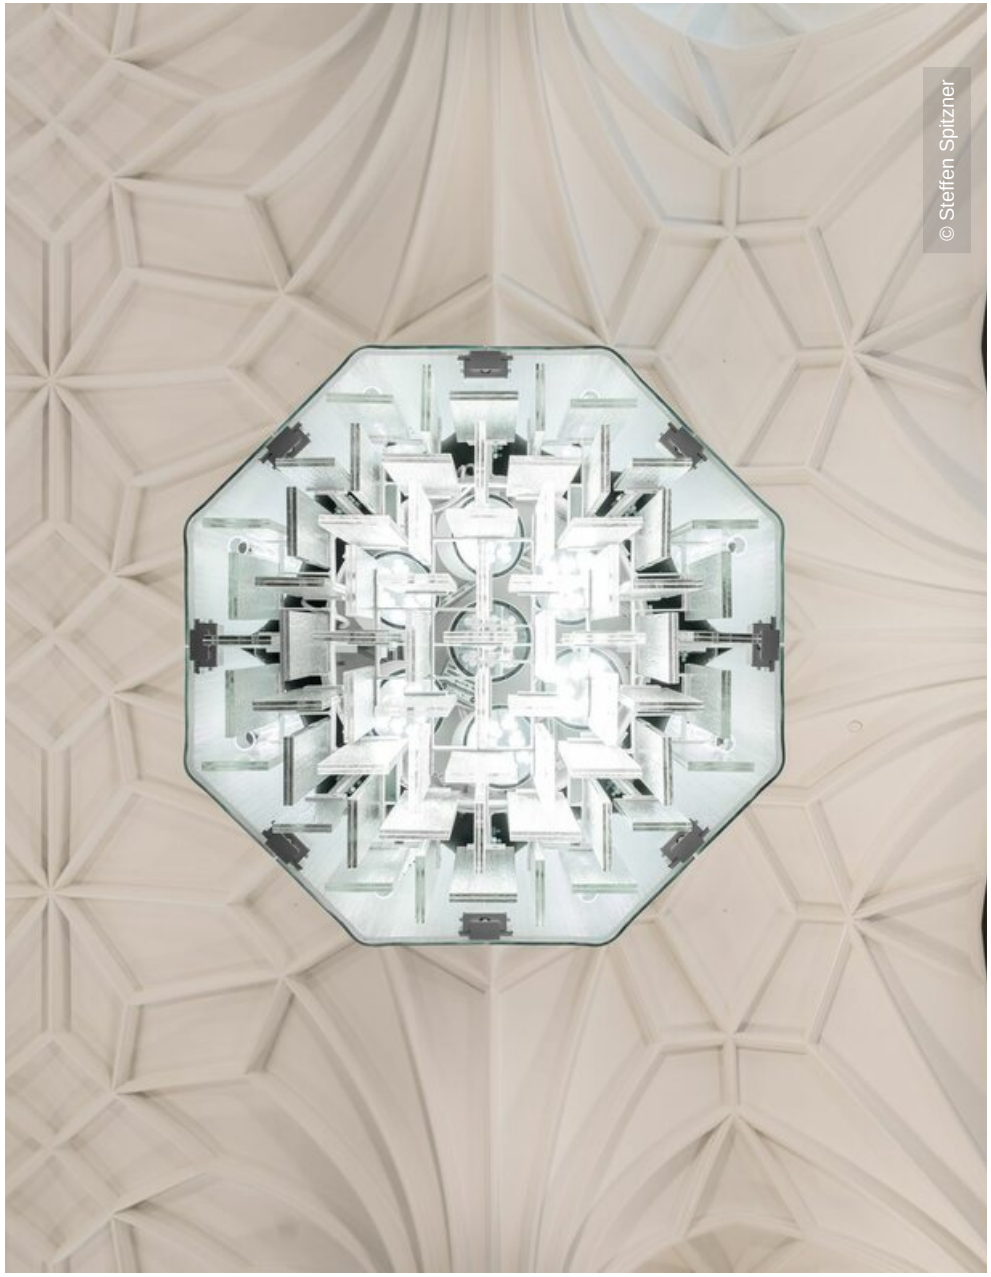
© Steffen Spitzner

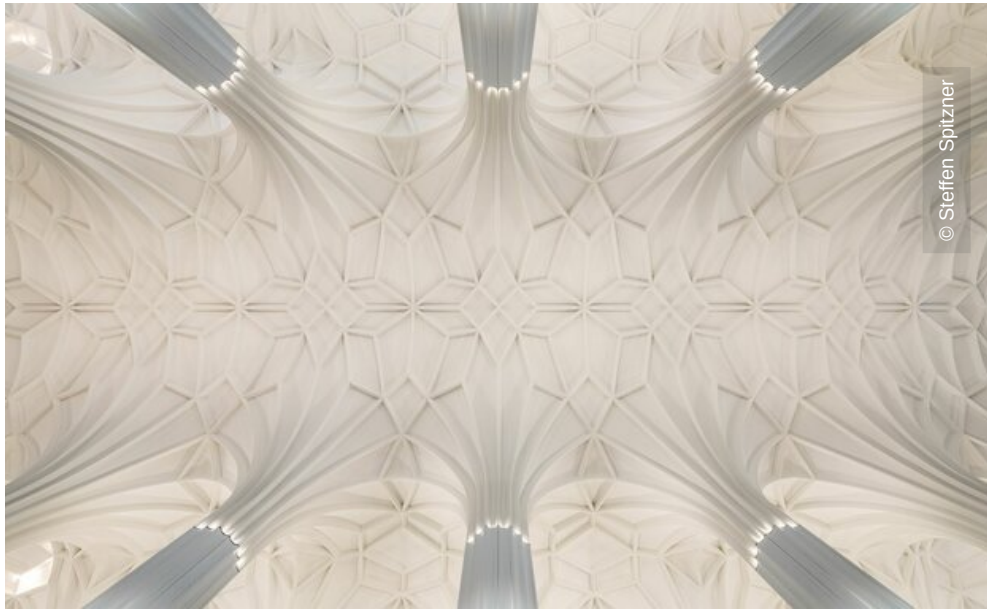
© Steffen Spitzner