NORTEC WOODline

Raised floor with parquet


The raised access floor system NORTEC is the ideal product for nearly all applications with its excellent technical and building-physical characteristics. The raised access floor panels consist of fibre-reinforced calcium sulphate and are applied with a steel sheet on the lower side. The panels are protected against shock and humidity by an edge trim on all edges. The substructure consists of height-adjustable zinc-coated steel pedestals from our own production which form the necessary cavity for installations and gaskets for sound decoupling.

- **Superb walking comfort**
- **Very high loadability**
- **Non-combustible**
- **Simple lifting and exchanging of single panels**
- **Parquet slats from own production with highest quality**

Examples for areas of application

Work: Common Rooms, Facilities for Meetings, Conventions and Conferences, Office Buildings

Public Areas: Escape Routes

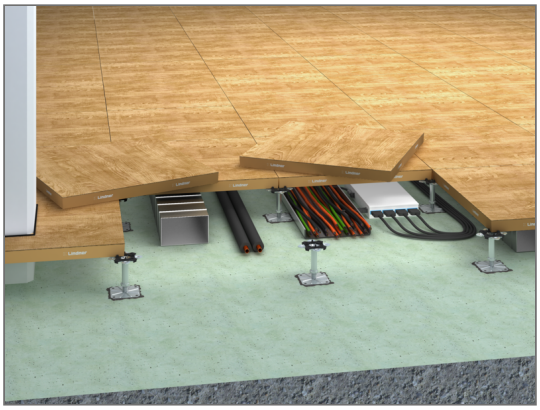

Technical details

Dimensions		
Pedestal grid		600 mm x 600 mm
Dimensional deviation	EN 12825	Class 1

Static

Static	
Seismic Safety	possible according to DIN EN 1998-1

Fire protection

Building Material Class		
Building Material Class	EN 13501-1	A1
Building Material Class	DIN 4102 1	A2
Designation by building authorities	EN 13501-1	non-combustible

We reserve the right to adapt and amend all details and information at any time. We do not accept liability for information that is inadvertently incorrect. Dimensional tolerances are permissible in compliance with the applicable standards. This document is protected by copyright law. Processing, unauthorised use or reproduction and public distribution are not permitted. Reproduction and distribution to third parties are only permitted with our express consent.

Designation by the building authorities	DIN 4102 1	non-combustible

Sustainability

Declarations

Circular Economy	Cradle to Cradle Certified® Silver
EPD (Environmental Product Declaration)	The product has a verified EPD in compliance with the applicable standards. (ISO 14025/EN 15804)
French VOC Regulation	Emission class A+
Sustainable forestry	Our products can be supplied FSC™ -certified (chain of custody certification) and fulfil all the necessary requirements. Licence number: FSC™ C119815

Coverings

Coverings

Suitability of covering	WOODline

We reserve the right to adapt and amend all details and information at any time. We do not accept liability for information that is inadvertently incorrect. Dimensional tolerances are permissible in compliance with the applicable standards. This document is protected by copyright law. Processing, unauthorised use or reproduction and public distribution are not permitted. Reproduction and distribution to third parties are only permitted with our express consent.